


Anillos cortantes

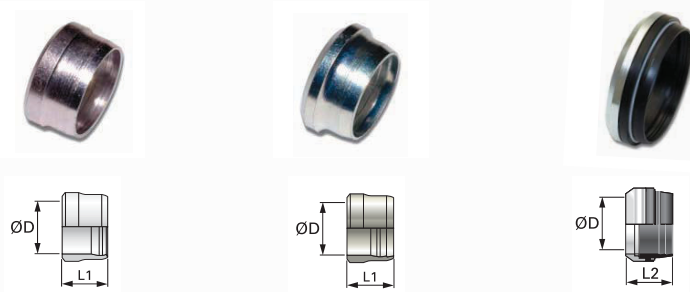

PN	ØD	C	Anillo de una arista	Bell code	Anillo de doble arista	Bell code	L1		Anillo DiNova	Bell code	L2			
LL	100	4	M8x1	8124E04 00	15-31/LL4		6	0,001						
		5	M10x1	8124E05 00	15-31/LL5		7	0,001						
		6	M10x1	8124E06 00	15-31/LL6		7	0,001						
		8	M12x1	8124E08 00	15-31/LL8		7	0,001						
		10	M14x1	8124E10 00	15-31/LL10		7	0,001						
		12	M16x1	8124E12 00	15-31/LL12		7,5	0,002						
L	400	6	M12x1,5			8224L06 00	07-31/L6	9,5	0,002	8324L06 00	06-36/L6	9,7	0,002	
		8	M14x1,5			8224L08 00	07-31/L8	10	0,003	8324L08 00	06-36/L8	10,2	0,003	
		10	M16x1,5			8224L10 00	07-31/L10	10,5	0,004	8324L10 00	06-36/L10	10,6	0,004	
		12	M18x1,5			8224L12 00	07-31/L12	10,5	0,005	8324L12 00	06-36/L12	10,6	0,004	
		15	M22x1,5			8224L15 00	07-31/L15	10,5	0,006	8324L15 00	06-36/L15	10,8	0,006	
		315	18	M26x1,5			8224L18 00	07-31/L18	10,5	0,007	8324L18 00	06-36/L18	11,1	0,007
			22	M30x2			8224L22 00	07-31/L22	11	0,009	8324L22 00	06-36/L22	12,3	0,010
		250	28	M36x2			8224L28 00	07-31/L28	11	0,012	8324L28 00	06-36/L28	12,1	0,011
			35	M45x2			8224L35 00	07-31/L35	13,5	0,021	8324L35 00	06-36/L35	14,3	0,021
			42	M52x2			8224L42 00	07-31/L42	13,5	0,024	8324L42 00	06-36/L42	14,3	0,028
S	630	6	M14x1,5			8224L06 00	07-31/L6	9,5	0,002	8324L06 00	06-36/L6	9,7	0,002	
		8	M16x1,5			8224L08 00	07-31/L8	10	0,003	8324L08 00	06-36/L8	10,2	0,003	
		10	M18x1,5			8224L10 00	07-31/L10	10,5	0,004	8324L10 00	06-36/L10	10,6	0,004	
		12	M20x1,5			8224L12 00	07-31/L12	10,5	0,005	8324L12 00	06-36/L12	10,6	0,004	
		14	M22x1,5			8224S14 00	07-31/S14	10,5	0,006	8324S14 00	06-36/S14	10,8	0,005	
		16	M24x1,5			8224S16 00	07-31/S16	10,5	0,007	8324S16 00	06-36/S16	11	0,006	
		400	20	M30x2			8224S20 00	07-31/S20	13	0,012	8324S20 00	06-36/S20	13,6	0,012
			25	M36x2			8224S25 00	07-31/S25	13,5	0,016	8324S25 00	06-36/S25	14,6	0,017
			30	M42x2			8224S30 00	07-31/S30	13,5	0,020	8324S30 00	06-36/S30	14,6	0,020
		315	38	M52x2			8224S38 00	07-31/S38	13,5	0,023	8324S38 00	06-36/S38	15,1	0,028

El anillo DiNova garantiza:

- una **estanqueidad** duradera para que los equipos se conserven limpios;
- una **fiabilidad** total del ensamblaje;
- la **seguridad** de las instalaciones.

